



cps® Automotive

REVOLUTIONARY EASE AND ENDURANCE

**7" COLOR TOUCH
SCREEN CONTROL**

**PATENTED OILLESS
COMPRESSOR**

**PATENTED
MOTOR-CONTROLLED
BALL VALVES**

1-2-5 WARRANTY

**DUAL HANDLE BARS/
HOSE DRAPES**



CPS GLOBAL HEADQUARTERS
1010 East 31st Street
Hialeah, Florida 33013 U.S.A.

FOR MORE INFORMATION CALL:
Toll Free: 877.776.8486
Telephone: 905.615.8620

www.cpsproducts.com

CPS reserves the right to make changes to, or discontinue any product or service identified in this publication without notice. CPS advises its customers to ensure they have obtained the latest and most current version of any relevant information before placing any orders. ©2014 CPS PRODUCTS. ALL RIGHTS RESERVED. PRINTED IN U.S.A. 8/2014

VIEW **MOTORVAC** **cps**®

CPS Automotive proudly presents the latest in ease and endurance with its FX Series line of Refrigerant Management Centers that quickly and efficiently recover, recycle, and recharge automotive AC systems.

FEATURES

- 7" Color touch screen control panel
- Motor-controlled ball valves
- 1-2-5 Warranty
- Dual handle bars/hose drapes
- Displays maximum load up to 220 lbs. (up to 100 kg)
- Foam-filled wheels
- Refrigerant Management System monitors filter life and refrigerant usage
- Patented unique, fast and complete refrigerant change over system



SPECIFICATIONS

- 50 lb. recovery tank
(two with FX3030 and FX3030W)
- 2/3 Hp oilless compressor
- Recovery rate = Up to 1 lb./min
- 6 CFM vacuum pump/ 50 micron rated
- 3.5" Gauges
- 10' Power cord
- 115v, 850 W


REVOLUTIONARY TECHNOLOGY

- Supports multiple languages/UOM
- A/C Systems capacity database included
- Quickly access all functions from the main screen
- Manifold mode enable printing a snap-shot of pressures before and after service


AVAILABILITY

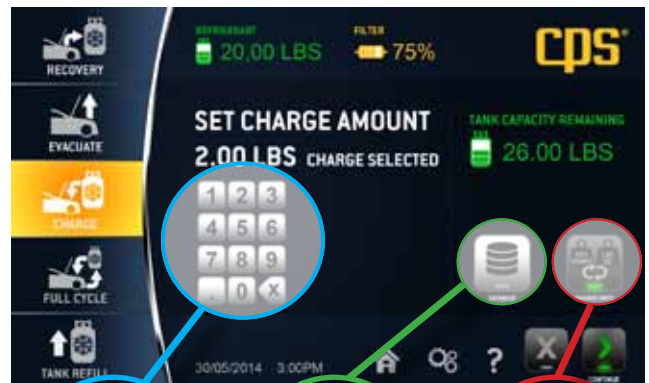

Fully interactive touch-pad



Access database



Quickly change unit of measurement

Part No.	Certification	Refrigerant	Dimensions (inches)				UPC	HTC
			H (in)	W (in)	D (in)	Weight (lb)		
FX134A	SAE J2788H	R134a	47.5	27.5	25	208	750377134012	8415.83.90
FX1234W without Ref ID	SAE J2843	R1234yf	47.5	27.5	25	208	750377123412	8415.83.90
FX1234	SAE J2843	R1234yf	47.5	27.5	25	208	750377123405	8415.83.90
FX3030	SAE J3030	R134a & R1234yf	60	27.5	25	240	750377303012	8415.83.90